

AMERICA ASIA GROUP CO.


2482 Roanoke Rd, San Marino, California, 91108, USA

Tel:626-309-0198 Fax:626-309-0185 Web:aagcusa.com Email:aagc888@aol.com

Switch Insulators

2 1/4" B.C. 7.5 kV Thru 23 kV Class For Indoor And Outdoor Applications

These strength switch insulators are widely used for indoor and outdoor bus and switch applications. hook-stick disconnect switches, and cabinet mounting of fuses. Available in 7.5, 15, and 23kV class to 150kV BIL. They are constructed of high strength wet process electrical porcelain with "skyline" gray glaze (ANSI-70). The heavy steel caps are hot-dipped galvanized and have captive mounting bolts (3/8"#16x1"long) in line or making as customer requested.

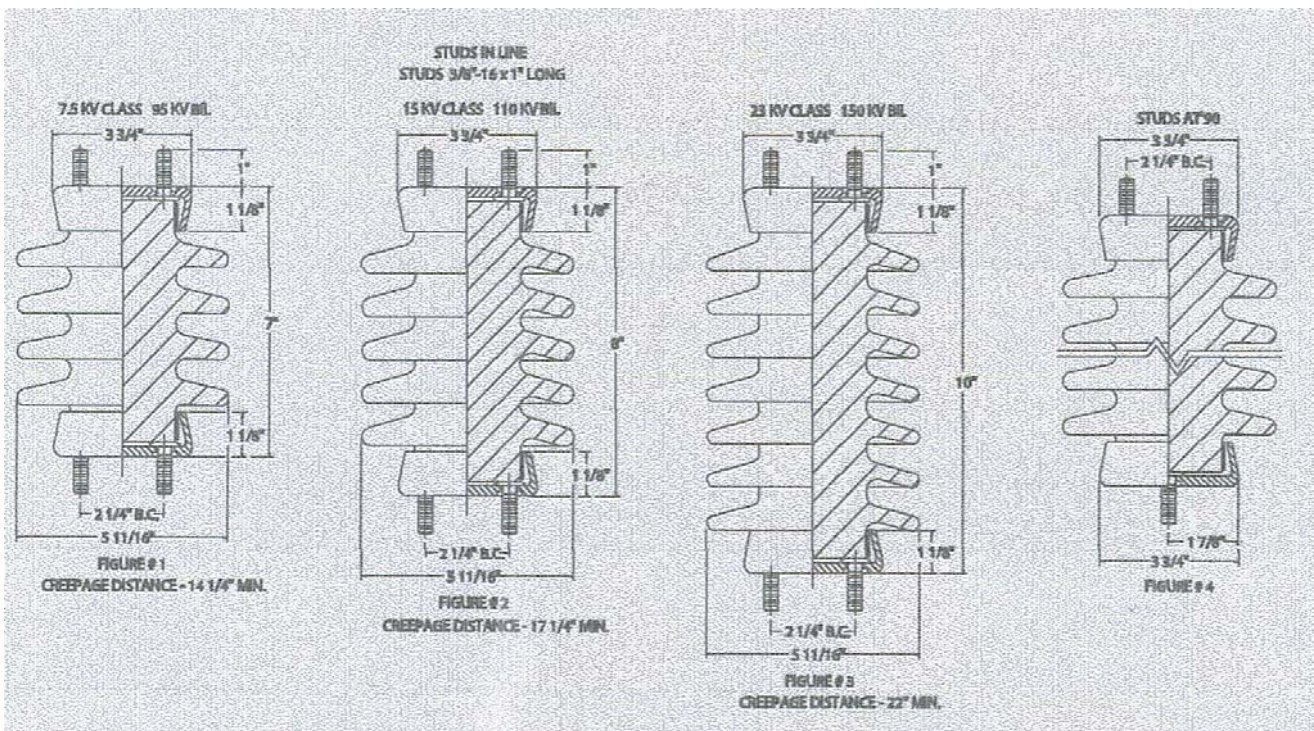

| AAGC No. | PPC No. | kV Class | Fig. No. | Height (Inches) | Strength Rating | | | |
|----------|---------|----------|----------|-----------------|-----------------|-------------|--------------------|-----------------|
| | | | | | Cantilever lb. | Tensile lb. | Torsional Inch-lbs | Compression lb. |
| 3001 | 70501 | 7.5 | 1 | 7 | 1200 | 5000 | 3000 In. | 5000 |
| 3003 | 70503 | 7.5 | 4 | 7 | 1200 | 5000 | 3000 In. | 5000 |
| 3005 | 70505 | 15 | 2 | 8 | 1000 | 5000 | 3000 In. | 5000 |
| 3007 | 70507 | 15 | 4 | 8 | 1000 | 5000 | 3000 In. | 5000 |
| 3009 | 70509 | 23 | 3 | 10 | 1000 | 5000 | 3000 In. | 5000 |
| 3011 | 70511 | 23 | 4 | 10 | 1000 | 5000 | 3000 In. | 5000 |